



JLRE-C10



JLRE-C30



JLRE-C50



JLRE-C100



JLRE-C200



JLRE-C300




JLRE-C400

ESPECIFICACIONES ELÉCTRICAS


MODELO	POTENCIA	CORRIENTE ELÉCTRICA	FLUJO LUMINOSO	VOLTAJE DE ENTRADA	DIMENSIONES (largo * alto)
JLRE-C10	10W	140 mA	1200 lm	110-240V~ 60Hz	102mm* 90mm
JLRE-C30	30W	210-460mA	2700 lm	110-240V~ 60Hz	178mm * 190mm
JLRE-C50	50W	210-460mA	4500 lm	110-240V ~ 60Hz	205mm * 215mm
JLRE-C100	100W	0,76-1,43A	9000 lm	110-240V ~ 60Hz	275mm * 235mm
JLRE-C200	200W	1,53-2,86A	18000 lm	110-240V ~60 Hz	390mm * 335mm
JLRE-C300	300W	2,47A	28000 lm	85-265V ~ 50/60Hz	450mm * 320mm
JLRE-C400	400W	2,8A	38000 lm	85-265V ~50/60 Hz	500mm*345mm

Dimensiones

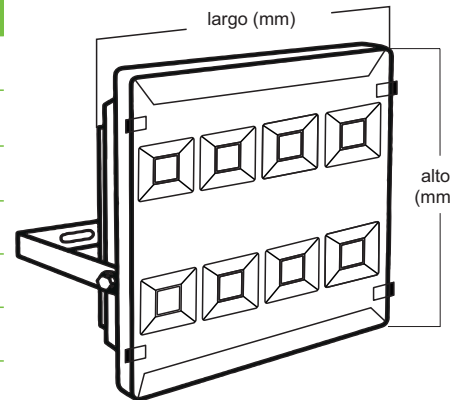


INSTALACIÓN:

① Sitúe el soporte en la superficie y marque los orificios de montaje.




② Perfore y fije el soporte a la superficie utilizando tornillos adecuados.




③

Realice la conexión eléctrica de acuerdo a la ilustración.



④

Fije la inclinación del reflector en el ángulo deseado.



NOM

NOM-003-SCFI-2014